

## PROCESS AND MATERIALS FOR INDUCING PRE-TILT IN LIQUID CRYSTALS AND LIQUID CRYSTAL DISPLAYS

**Publication number:** JP2001517317 (T)

**Publication date:** 2001-10-02

**Inventor(s):**

**Applicant(s):**

**Classification:**

**- international:** **C08G73/10; G02F1/1337; C08G73/00; G02F1/13;** (IPC1-7): G02F1/1337

**- European:** C08G73/10; C08G73/10F; C08G73/10Q; G02F1/1337C3; G02F1/1337T4

**Application number:** JP19970535376T 19970327

**Priority number(s):** US19960624942 19960329; US19960645824 19960514; WO1997US04808 19970327

**Also published as:**


JP3725555 (B2)  
WO9737273 (A2)  
WO9737273 (A3)  
US5929201 (A)  
KR20000005065 (A)

more >>

Abstract not available for JP 2001517317 (T)

Abstract of corresponding document: **WO 9737273 (A2)**

A process for inducing pre-tilt in alignment of a liquid crystal medium comprising exposing at least one optical alignment layer, comprising anisotropically absorbing molecules and hydrophobic moieties, to polarized light; the polarized light having a wavelength within the absorption band of said anisotropically absorbing molecules; wherein the exposed anisotropically absorbing molecules induce alignment of the liquid crystal medium at an angle  $+$  and  $-$  theta with respect to the direction of the polarization of the incident light beam and along the surface of the optical alignment layer, and induce a pre-tilt at an angle PHI with respect to the surface of the optical alignment layer and applying a liquid crystal medium to said optical alignment layer, is described.; The invention also is directed to liquid crystal display elements made by the process of the invention and to novel polyimide compositions that are useful as optical alignment layers in the invention.

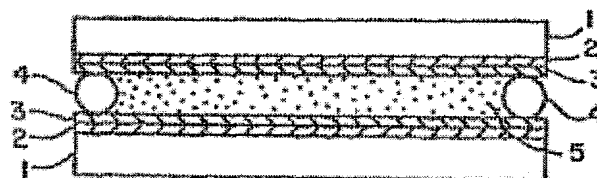

Data supplied from the **esp@cenet** database — Worldwide